

Accurate Range-free Localization Based on Quantum Particle Swarm Optimization in Heterogeneous Wireless Sensor Networks

Wenlan Wu^{1,2,*}, Xianbin Wen^{1,2,*}, Haixia Xu^{1,2}, Liming Yuan^{1,2} and Qingxia Meng³

¹Key Laboratory of Computer Vision and System, Ministry of Education,
Tianjin University of Technology, Tianjin 300384, China
[e-mail: w303446381@163.com]

²Tianjin Key Laboratory of Intelligence Computing and Novel Software Technology,
Tianjin University of Technology, Tianjin 300384, China
[e-mail: xbwen317@163.com]

³Tianjin University, School of Computer Science and Technology, Tianjin, 300072, China
*Corresponding author: Wenlan Wu ; Xianbin Wen

*Received July 16, 2017; revised September 24, 2017; accepted October 12, 2017;
published March 31, 2018*

Abstract

This paper presents a novel range-free localization algorithm based on quantum particle swarm optimization. The proposed algorithm is capable of estimating the distance between two non-neighboring sensors for multi-hop heterogeneous wireless sensor networks where all nodes' communication ranges are different. Firstly, we construct a new cumulative distribution function of expected hop progress for sensor nodes with different transmission capability. Then, the distance between any two nodes can be computed accurately and effectively by deriving the mathematical expectation of cumulative distribution function. Finally, quantum particle swarm optimization algorithm is used to improve the positioning accuracy. Simulation results show that the proposed algorithm is superior in the localization accuracy and efficiency when used in random and uniform placement of nodes for heterogeneous wireless sensor networks.

Keywords: Heterogeneous wireless sensor networks, range-free localization, multi-hop, expected hop progress, quantum particle swarm optimization

1. Introduction

Recently, wireless sensor networks (WSNs) have attracted keen attentions in various applications such as monitoring a spatial physical phenomenon and tracking mobile targets [1-4]. It comprises of many sensors randomly/spatially distributed over a certain area with the purpose of extracting, processing and transmitting information in the monitoring area [5-6]. In WSNs, node localization is the key technology and the detection of message without location information is meaningless.

Nowadays, the research of localization algorithms is mainly focused on homogeneous wireless sensor networks and little on heterogeneous wireless sensor networks (HWSN). However, heterogeneity problem of WSNs exists commonly because of the differences in node energy, computing power, network protocol and communication link, etc. The heterogeneity may affect barrier coverage, the localization method, localization mechanism and the maximum communication radius between nodes. For HWSN, several researchers have done some research on barrier coverage problems [7-9]. However, there is little research about different communication radius of sensor nodes. Obviously, sensor nodes with different communication radius severely reduce connectivity of networks, thereby increase distance calculation error, which ultimately lead to low positioning accuracy. Therefore, in this paper we study the optimization method of node location for HWSN where all nodes' communication ranges are different.

Traditional range-free algorithms, which assume the same communication capability throughout the network, make the localization accuracy poor in HWSN. Thus, several researchers have proposed expected hop progress (EHP) approach to estimate the distance between anchor nodes (ANs) and unknown nodes (UNs) for HWSN [10]. The algorithm depends not only on the communication radius of ANs, but also on the communication radius of inter-nodes (INs), which are closer to a real Euclidean distance between any two nodes. The problem with the approach, however, is that conditional cumulative distribution function (CDF) has a high computing complexity and the localization condition cannot be always guaranteed, especially when the node communication radius are not small enough. To solve these problems, a modified EHP approach is presented by redefining a new CDF and achieves satisfactory localization results [11]. However, the main drawback is that the modified approach has additional overhead and energy consumption because of training before redefining CDF. On the other hand, basic methods of calculating sensor nodes' location (i.e., Trilateration, Triangulation and Maximum Likelihood Estimation (MLE)) are not appropriate for HWSN where any distance estimation error can have a significantly different impact on localization accuracy. For instance, errors are expected to occur when estimating the distance between nodes and computing the coordinates of UNs by MLE, thereby hindering localization accuracy. To improve localization accuracy error of traditional position calculation methods, many researchers proposed different optimization approaches, such as genetic algorithm (GA) [12], particle swarm optimization (PSO) [13] and quantum particle swarm optimization (QPSO) [14]. QPSO has the advantage of fast convergence, and it can play a quick and easy solution advantage of intelligent optimization algorithms. Therefore, QPSO algorithm is more applicable to multi-hop HWSN localization. But, most of localization optimization algorithms are aim at homogeneous wireless sensor networks with the same communication radius, which is less used in the study of HWSN localization.

Up to now, no method can obtain the satisfying localization results for HWSN. In this paper, to optimize the positioning algorithm, we propose a novel localization algorithm based on EHP and QPSO in the realm of multi-hop range-free localization schemes. Firstly, we assume that transmission coverage of each node is circular, i.e., the degree of irregularity (DoI) of the communication radius is equal to zero. Then, a new CDF expression of EHP is constructed to reduce the computational complexity. And the mathematical expectation of CDF is considered estimation distance. Finally, QPSO algorithm is used for localization optimization.

The remainder of this paper is organized as follows. In Section 2, we elaborate the localization model of multi-hop HWSN in the two-dimensional space, and introduce hop progress model for different communication range and node density. Section 3 describes the proposed range-free localization algorithm and analyzes QPSO algorithm in multi-hop HWSN. Experimental results analysis is given in Section 4 and concluding remarks are made in Section 5.

2. Network Model

In real life, most WSNs deployments are performed though low flying airplanes or unmanned ground vehicles. We assume that all sensors, deployed randomly and uniformly, are heterogeneous, omnidirectional and stationary. Meanwhile, consider a HWSN in a 2D square area $S=L \times L$ with N sensors, denoted by a set $N = (n_1, n_2, \dots, n_N)$, where n_i is the i -th sensor. ANs are marked with red asterisks to help in estimating sensors' positions, and UNs marked with red circles is to compute its location based on the information obtained from ANs, as shown in Fig. 1. The link between any two nodes represents one hop, which is able to reach or communicate with other sensors.

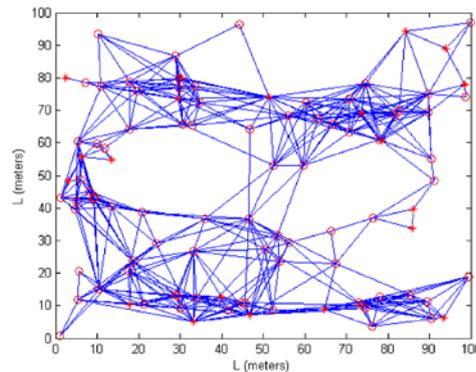


Fig. 1. Heterogeneous wireless sensor network model

In multi-hop HWSN localization, the goal is to estimate the location of all UNs by using ANs and partial information of the distances between some pair of ANs and UNs. For the sake of simplicity, we employ the shortest path method to obtain a possible path between a source sensor and a destination sensor with the minimum number of hops. Then using ANs' available information, j -th unknown node computes easily an estimate of its distance to the i -th anchor as $d_{i,j} \approx d_{i,k} + d_{k,j}$, where $d_{i,k}$ ($d_{k,j}$) denote the distance between ANs (INs) and INs (UNs). Compared with homogeneous localization algorithms, sensor nodes' per hop distance possesses huge discrepancy because of different maximum communication radius, as shown

in **Fig. 2**. In homogeneous WSN, multi-hop range-free localization algorithms, to a certain extent, caused biggish distance estimation error due to that it exploits the same hop distance instead of inter-nodes each hop Euclidean distance. To solve this problem, accumulative distance is refined to calculate each hop distance by using the minimum mean square error (MMSE) of the distance estimation method as [10-11]

$$\hat{d}_{i-j} = E(d_{i-j}) \approx E(d_{i-k_1}) + E(d_{k_1-k_2}) + \dots + E(d_{k_{m-1}-k_m}) + E(d_{k_m-j}) \quad (1)$$

where k_m denotes m -th inter-node. $E(d_{i-k_1})$, $E(d_{k_{m-1}-k_m})$ and $E(d_{k_m-j})$ represent first-hop distance, inter-node hop distance and the last-hop distance, respectively. Therefore, this is obvious that to obtain the estimate distance \hat{d}_{i-j} between ANs and UNs, three distance formulae need to be derived, i.e., first-hop distance, inter-node hop distance, the last-hop distance, which are given in the next section respectively.

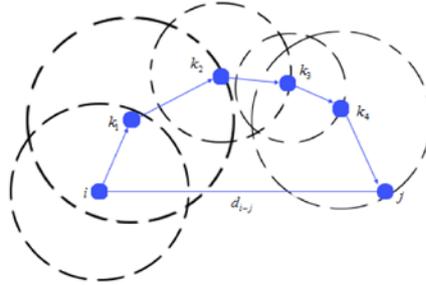


Fig. 2. Multi-hop communication

In the network model, we assume that UNs have the capacity to receive the information from ANs for distance estimation, then iteratively optimizing the coordinates of unknown node by QPSO. Meanwhile, transmission coverage area is considered to be circular. The major symbols used in this paper are listed in **Table 1**.

Table 1. The major symbols used in this paper

Symbols	Definitions
i, k, j	anchor nodes, inter-nodes and unknown nodes, respectively
r_i, r_k, r_j	communication radius at the i -th anchor node, the k -th inter-node and the j -th unknown node, respectively
N, N_a, N_u	the number of all nodes, anchor nodes and unknown nodes.
$area(i, r_i), area(k, r_k)$	the i -th (k -th) node's coverage area having the i -th (k -th) sensor as a center and r_i as a circle of radius
$area(j, r_k)$	the j -th unknown node's coverage area having the j -th unknown sensor as a center and inter-node radius r_k as a circle of radius
λ	node density in monitoring area
$\theta, \theta', \theta_z$ and θ'_z	angle of the link between anchor nodes and unknown nodes
$d_{i,k_1}^E, d_{k_{m-1},k_m}^E, d_{k_m,j}^E$	first-hop distance, inter-node hop distance and the last-hop distance, respectively
(x_j, y_j)	the coordinates of unknown nodes
M	the size of swarm
t_{max}	the maximum number of iterations

3. Analytical evaluation of EHP and QPSO

In this section, expressions of hop distance are accurately derived aiming at sensor nodes with different maximum communication radius. Then, the localization optimization algorithm is studied in detail, in which we mainly introduce the principle of QPSO and analyze the convergence of criterion QPSO.

3.1 Hop Distance Derivation Using EHP Approach

For the sake of clarity, this paper is only to discuss the two-hop distance, in what follows, we denote by X , Y and Z the random variables that represent d_{i-j} , d_{k-j} and d_{i-k} respectively [10-11]. Then, the probabilistic distribution mode for multi-hop HWSN is developed using the conditional cumulative distribution function (CDF) $F_{Z|X}(z)=P(Z\leq z|x)$ of Z with respect to the random variable X .

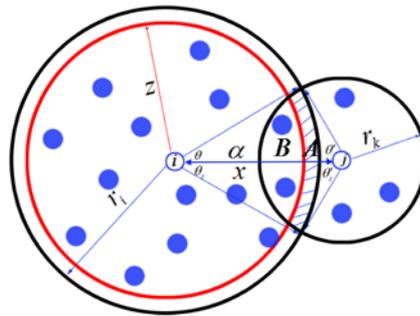


Fig. 3. EHP analysis

In Fig. 3, $Z \leq z$ is guaranteed only if there are no nodes in the dashed area A . Therefore, the conditional CDF can be defined as [10-11], [15]

$$F_{Z|X}(z) = P(Z \leq z | x) = P(A_0) \tag{2}$$

where $P(A_0)$ is the probability of the event A_0 , A_0 indicates no nodes in the dashed area A . Let Q be the potential forwarding area wherein k -th node communicates directly with the j -th node. Meanwhile, i -th node can indirectly transmit information to j -th node through inter-node k in the area Q . Then, Q , which relies on both r_i and r_k , is given by

$$Q = \text{area}(i, r_i) \cap \text{area}(j, r_k) = A \cup B \tag{3}$$

And, the probability of K nodes in area A follows Binomial distribution $X \sim B(N, p)$ where $p = A/S$. For relatively large N and small p , $B(N, p)$ can be accurately approximated by a Poisson distribution. Enlightened by the reference 15, we employ simplified conditional CDF formulas, which can adapt to the heterogeneous nature of WSNs. Therefore, we have

$$F_{Z|X}(z) = e^{-\lambda A} \tag{4}$$

Where

$$\lambda = Np = \frac{N}{S} \quad (5)$$

By using some geometrical properties to find the geometric relation between the anchor node and the unknown node, and in accordance with trigonometric transformations and rules to represent this relation, so the area of the shaded part A can be given by

$$A = r_i^2 \left(\theta - \frac{\sin(2\theta)}{2} \right) + r_k^2 \left(\theta' - \theta'_z + \frac{\sin(2\theta'_z) - \sin(2\theta')}{2} \right) - z^2 \left(\theta_z - \frac{\sin(2\theta_z)}{2} \right) \quad (6)$$

where

$$\begin{cases} \theta = \arccos\left(\frac{r_i^2 - r_k^2 + x^2}{2r_i x}\right) \\ \theta' = \arccos\left(\frac{r_k^2 - r_i^2 + x^2}{2r_k x}\right) \\ \theta_z = \arccos\left(\frac{z^2 - r_k^2 + x^2}{2zx}\right) \\ \theta'_z = \arccos\left(\frac{r_k^2 - z^2 + x^2}{2r_k x}\right) \end{cases} \quad (7)$$

Combined with the above analysis, the EHP between i -th anchor node and k_1 -th inter-node can be derived as follows [10], [11], [15]

$$\begin{aligned} d_{i-k_1}^E &= \int_{r_i}^{r_i+r_{k_1}} \left(\mu(1-F_{Z|X}(\mu)) + \int_{\mu}^{r_i} (1-F_{Z|X}(z)) dz \right) f_X(x) dx \\ &= \int_{r_i}^{r_i+r_{k_1}} \mu(1-F_{Z|X}(\mu)) f_X(x) dx + \int_{r_i}^{r_i+r_{k_1}} \left(\int_{\mu}^{r_i} (1-F_{Z|X}(z)) dz \right) f_X(x) dx \end{aligned} \quad (8)$$

where $\mu = x - r_{k_1}$, $f_X(x) = 1/r_{k_1}$ is the probability density function (pdf) of X . The distance computing model of inter-node hop distance $d_{k_{m-1}-k_m}^E$ is the same as first-hop distance $d_{i-k_1}^E$, and so it can be obtained by formula (8). However, by definition, equation (8) is inapplicable for calculating the last-hop distance.

Since the j -th unknown node could be located anywhere in $area(k, r_k)$ with the same probability, the last-hop $d_{k_m-j}^E$ is given by

$$d_{k_m-j}^E = \int_0^{r_{k_m}} y f_Y(y) dy = \int_0^{r_{k_m}} \frac{y}{r_{k_m}} dy = \frac{r_{k_m}}{2} \quad (9)$$

where Y is considered as a distributed random variable on $[0, r_{k_m}]$, $f_Y(y) = 1/r_{k_m}$ denotes pdf of Y . According to hop distance equations, EHP approach depends not only on the communication radius of ANs, but also on the communication radius of INs. Therefore, the so-obtained estimation distance is more accurate than traditional range-free localization algorithms in multi-hop HWSN.

By avoiding complex conditional CDF formulas exploited in reference 10 and reference 11, the obtained EHP in this paper is higher in efficiency, lower in energy consumption, and easy to calculate. In addition, the proposed method is more accurate for the situation of low network node density and low proportion of beacon nodes. Unfortunately, With the increase of sensor nodes density, positioning accuracy is not satisfactory comparing with the existed EHP method for HWSN. In order to resolve this problem, we have introduced QPSO in the next section.

3.2 Quantum Particle Swarm Optimization

In order to improve the accuracy and efficiency of multi-hop localization algorithm, many optimization algorithms are proposed such as particle swarm optimization (PSO) and quantum particle swarm optimization (QPSO). PSO simulates the swarm behavior of birds and transfers the process of seeking the best solution for specific problems to the process which particles scout the best position in a certain area [16-17]. The shortcoming of the optimization model is easily trapped in the local optimum and appeared premature convergence. QPSO, proposed and developed by Sun et al. [18], is a modification of the standard PSO algorithm in the domain of quantum computing. QPSO shows fast convergence performance and stronger global search capability.

In QPSO algorithm, since the velocity and position of each particle cannot be determined together, the quantum state of the particle is represented by a wave function $\phi(Y) = 1/\sqrt{L} * e^{-|Y|/L}$. By the Monte Carlo method, the equation representing the position of particle is given as

$$X = P \pm \frac{L}{2} \ln\left(\frac{1}{u}\right) \quad (10)$$

where X represents the particle position, P is the local attractor of particle and u is a random number in the range of $[0,1]$. $L=1/\beta$ is the probability that the particle will appear at the opposite point position, in which β is the shrinkage factor varying with time t . Thus, equation (10) can be written as [19]

$$x_i(t+1) = p_i(t) \pm \frac{L(t)}{2} \ln\left(\frac{1}{u}\right) \quad (11)$$

where x_i and p_i denote the position and local attractor of the i -th particle, respectively. And p_i can be written as

$$p_i(t) = a \cdot pbest + (1-a) \cdot gbest \quad (12)$$

where a is the same as u , and so a is uniformly distributed number belongs to $[0,1]$. $pbest$ and $gbest$ present personal best position of the particles and global optimum position of the particles, respectively. In addition, by defining mean best position (mbest), the expression of parameter L can be derived as follows [18-20]

$$L(t) = 2\alpha |mbest_i(t) - x_{id}(t)| \quad (13)$$

in which

$$mbest(t) = \frac{1}{M} \sum_{i=1}^M pbest(t) \quad (14)$$

$$\alpha = \frac{(1-0.5) \cdot (t_{max} - t)}{t_{max}} + 0.5 \quad (15)$$

where α is just a parameter of QPSO, t is the number of iterations and $mbest$ is the average of the optimal location that all particles have searched in the local.

QPSO transforms the node localization problem into the optimization problem. In the process of searching, the mean square error is used to be the fitness function of QPSO [21-23]. It is required to minimize this fitness function by multiple iterations. To adjust multi-hop HWSN, a weight is introduced into the fitness algorithm to improve the QPSO, and then the calculated global optimum position of the particles through using iterative calculation will be closer to real nodes coordinate. Therefore, the fitness function, aiming at multi-hop HWSN localization problem, is formulated as

$$fitness(x, y) = \sum_{i=1}^n \eta f_i^2 \quad (16)$$

in which

$$f_i = \left| \sqrt{(x - x_i)^2 + (y - y_i)^2} - \hat{d}_{i-j} \right| \quad (17)$$

In the above equation, $\eta = (1/hop_i)^2$ represents weight values for each anchor node. Obviously, with the increase of the hops, the influence of weight values to fitness function gradually reduces. f_i is the difference between the distance of anchor node from particle and the estimation distance obtained by EHP approach. According to the results of the analysis above, the proposed algorithm based on EHP and QPSO are given as

Algorithm 1 Proposed localization algorithm for multi-hop HWSN.

Input: initialization N , N_a , anchor node coordinates (x_i, y_i) , all sensor nodes' communication radius r , node density λ , the size of swarm M , the position of each particle, the maximum number of iterations t_{max} .

Output: unknown node coordinates (x_j, y_j) .

- 1: **for** $i=1, 2, \dots, N_a$ **do**
 - 2: **for** $j= N - N_a, \dots, N$ **do**
 - 3: Compute first-hop distance d_{i,k_1}^E and inter-node hop distance d_{k_{m-1}, k_m}^E by equation (8);
 - 4: Compute and the last-hop distance $d_{k_m, j}^E$ according to equation (9);
 - 5: **end for**
 - 6: **end for**
 - 7: Obtain the estimation distance \hat{d}_{i-j} by equation (1);
 - 8: Calculate the fitness function value for each particle by equation (16);
 - 9: Compute the values of $pbest$ and $gbest$;
 - 10: **for** $t=1, 2, \dots, t_{max}$ **do**
-

```

11: Compute  $\alpha$  by equation (15);
12: Compute  $m_{best}$  by equation (14);
13: for  $j=1,2,\dots, M$  do
14:   Update position of the particle;
15:   Compute  $fitness$  by equation (16);
16:   if  $p_{best}(t) < p_{best}(t-1)$ 
17:     Update  $p_{best}$ ;
18:   end if
19: end for
20: Compute  $g_{best}$ ;
21: if  $g_{best}(t) < g_{best}(t-1)$ 
22:   Update  $g_{best}$ ;
23: end if
24: end for

```

4. Experimental Results and Analysis

In this section, the proposed method is compared with traditional and novel approaches for HWSN such as Amorphous [24-25], DV-hop [26], LAEP [27] and EHP [10]. Moreover, to verify the effectiveness of the algorithm, we compare QPSO algorithm with PSO algorithm in terms of localization accuracy and energy consumption. To evaluate the experimental results objectively, experimental parameters are tuned under the same condition, as Table 2 shows. All experimental results are obtained by averaging over 100 trials. Note that the CPU times were obtained by running the Matlab code on a DELL computer with Intel (R) Core (TM) i7-6700 CPU, 3.40 GHz, 16.0 GB RAM, with Matlab 2014(a) on Windows 10 (64-bit operating system) in all experiments.

In this paper, we propose the evaluating indicator to estimate a measure of localization accuracy, i.e., the normalized root mean square error (NRMSE) which is defined by

$$NRMSE = \sum_{j=1}^{N_u} \frac{\sqrt{(x_j - \hat{x}_j)^2 + (y_j - \hat{y}_j)^2}}{N_u \cdot r_j} \quad (18)$$

where r_j is communication radius of the unknown node j , N_u is the number of the unknown nodes and (\hat{x}_j, \hat{y}_j) is estimation value of coordinates (x_j, y_j) of the unknown nodes.

Table 2. Simulation parameters

Parameter	Value
S	$100 \times 100 \text{ m}^2$
N_a	20 or 10:5:45
λ	0.01:0.01:0.06
N	100:100:600
r_i	6-30
M	50
t_{max}	150 or 0:10:500

4.1 Comparing with classical methods

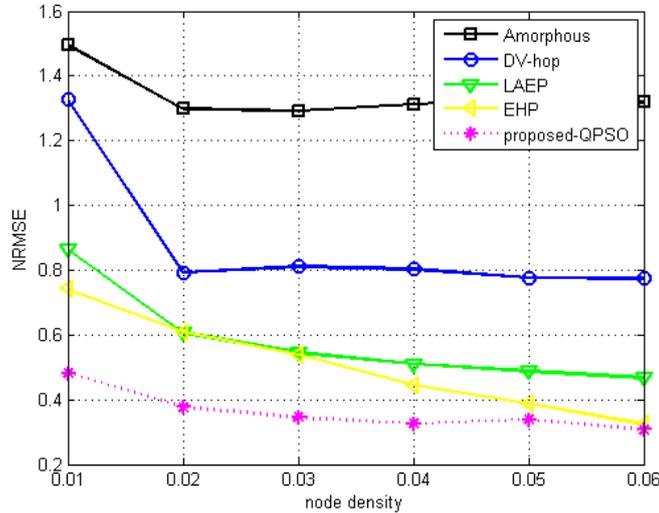


Fig. 4. NRMSE vs. node density in HWSN

Fig. 4 illustrates that the positioning error decreases with increasing node density. It is due to that the connectivity is improved with the increase of node density. The proposed algorithm shows a major decline and then a slow downtrend when node density is greater than 0.03. Its *NRMSE* is less than traditional and novel localization algorithms under various node densities. Thus, the proposed algorithm obviously improves localization accuracy, especially for the situation of low network node density.

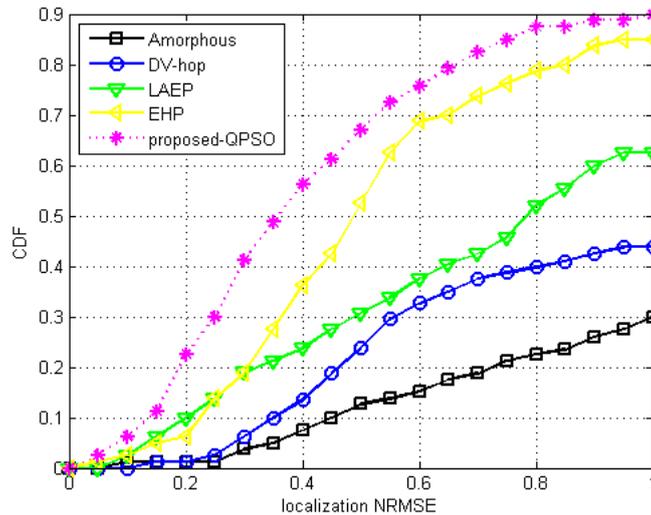


Fig. 5. localization NRMSE ‘s CDF for different localization methods in HWSN

Fig. 5 depicts the localization NRMSE’s CDF for different localization methods under the condition that node density is 0.01. It shows that the NRMSE’s CDF in the interval of 0.4 are 0.5625, 0.3625, 0.3275, 0.1350 and 0.0750 by using the proposed algorithm, EHP, LAEP, DV-Hop, and Amorphous, respectively. This further demonstrates the superiority of the

proposed algorithm.

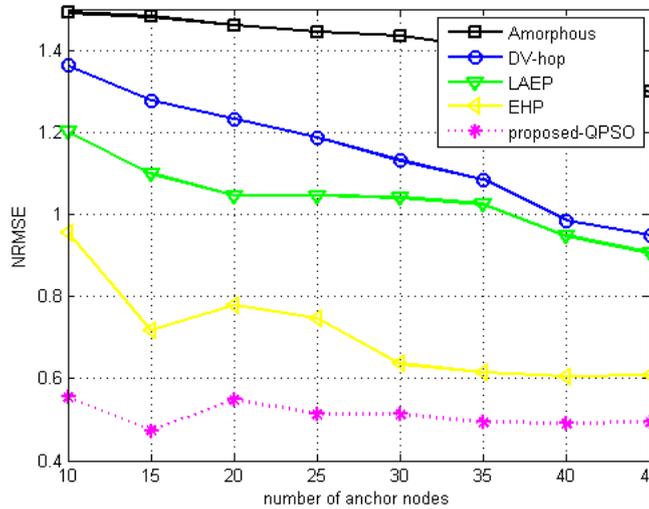


Fig. 6. NRMSE vs. number of anchor nodes in HWSN

Fig. 6 plots the localization NRMSE versus number of anchor nodes in HWSN. With increasing the number of anchor nodes, the positioning error has been reduced in general when other conditions remain unchanged except for node density (i.e., $\lambda=0.01$). A comparison of the results from Fig. 4 to Fig. 6 indicates that it is important to reasonably determine ANs' communication radius and node density for improving the localization accuracy.

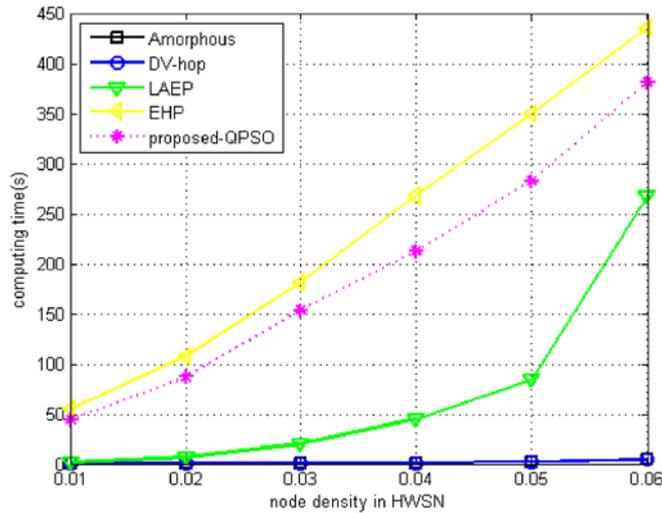


Fig. 7. time-consuming vs. node density in HWSN

In Fig. 7, we analyze the computational complexity of the localization algorithms. Experimental result indicates that among the localization approaches, energy consumption of the proposed algorithm is between EHP approach and classical approaches (i.e. Amorphous, DV-hop and LAEP). However, Fig. 4 shows that classical approaches are inapplicable for HWSN due to large localization error. Noting that, for EHP approach, the work in [11] is

actually an improved version of the work in [27] to adapt the heterogeneous network. Unfortunately, the complexity of the algorithm greatly increased because that one way makes the amount of computation huge due to the expression complexity of $F_{Z/X}(z)$, the other adds overhead because $F_{Z/X}(z)$ is determined by training during the improvement process. In this paper, our proposed algorithm can effectively reduce power cost as shown in Fig. 7.

4.2 Quantum Particle Swarm Optimization

The comparison of PSO and QPSO algorithm for HWSN is shown in Fig. 8 and Fig. 9, in which Fig. 8 plots the localization NRMSE and energy consumption in different density sensor nodes, respectively. The simulation results show that QPSO algorithm has better convergence accuracy and higher evolution velocity compared with PSO algorithm.

Fig. 9 illustrates the energy consumption and localization NRMSE with different iteration numbers. As seen from Fig. 9, compared with PSO algorithm, the QPSO algorithm achieved satisfactory result in HWSN, the computation time is shortened and optimization effect is better with 0~500 iteration computation. In addition, the optimization algorithms (i.e., both PSO algorithm and QPSO algorithm) are effective to ensure that the less number of iterations, the higher accuracy in multi-hop HWSN localization.

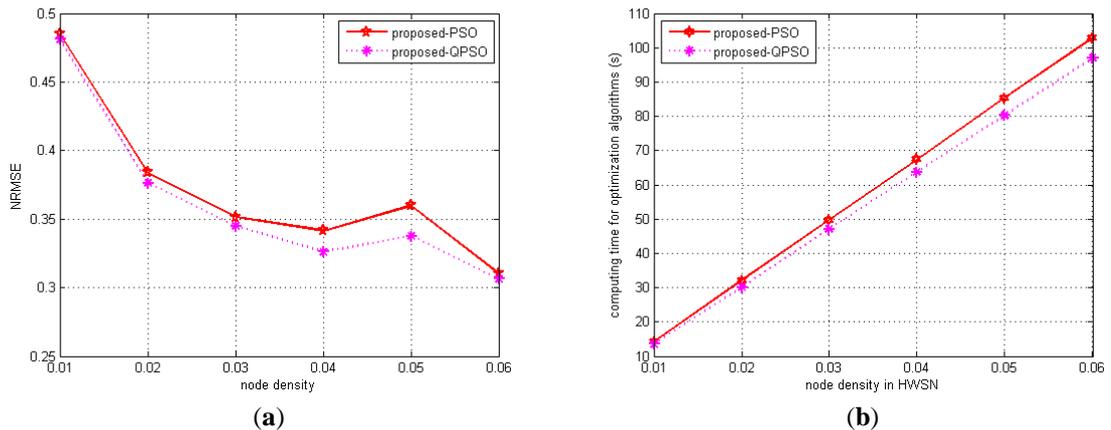


Fig. 8. Results with different node density: (a) NRMSE vs. node density for PSO and QPSO (150 iterations); (b) computing time vs. node density for PSO and QPSO (150 iterations)

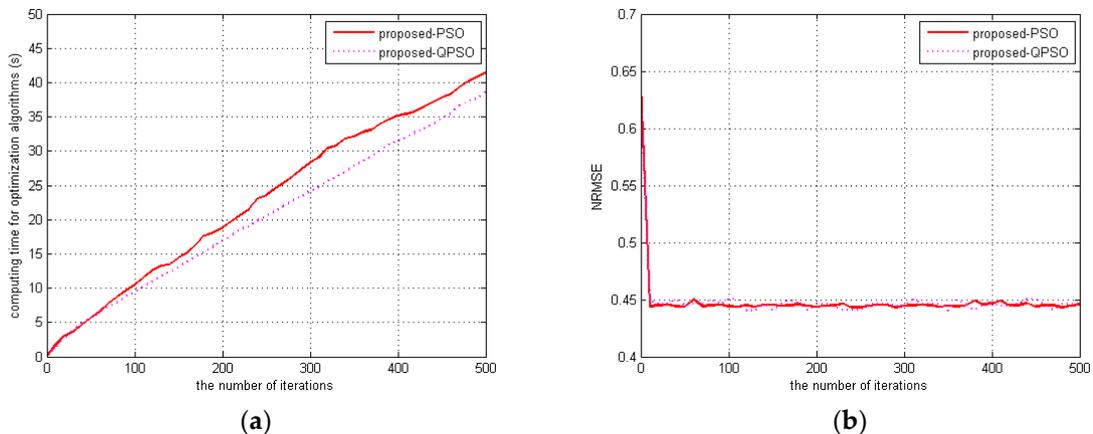


Fig. 9. Results with different iteration number: (a) computing time vs. the number of iterations; (b) NRMSE vs. the number of iterations

The result of Matlab simulation proves the feasibility of the proposed algorithm. The proposed algorithm not only has less error than other algorithms in dense HWSN, but also can be utilized in a sparsely distributed HWSN. Moreover, QPSO improves the efficiency and localization accuracy.

5. Conclusion

In this paper, a novel range-free localization algorithm based on QPSO is presented for multi-hop HWSN localization. We utilize the modified distance estimate method based on expected hop progress to reduce the computational complexity. In addition, QPSO algorithm which complies with the heterogeneous nature of WSNs is proposed successfully to optimize the coordinates of UNs. The proposed algorithm outperforms the state-of-the-art range-free ones in terms of localization accuracy and energy consumption.

Acknowledgment

This work is supported by National Natural Science Foundation of China (No.61472278).

References

- [1] J. Yang, J. Zhou, Z. Lv, W. Wei and H. Song, "A real-time monitoring system of industry carbon monoxide based on wireless sensor networks," *Sensors*, vol. 15, no. 12, pp. 29535–29546, November, 2015. [Article \(CrossRef Link\)](#).
- [2] R. Sarkar and J. Gao, "Differential forms for target tracking and aggregate queries in distributed networks," *IEEE/ACM Transactions on Networking*, vol. 21, no. 4, pp. 1159–1172, August, 2013. [Article \(CrossRef Link\)](#).
- [3] T. L. T. Nguyen, F. Septier, H. Rajaona, G. W. Peters, I. Nevat and Y. Delignon, "A bayesian perspective on multiple source localization in wireless sensor networks," *IEEE Transactions on Signal Processing*, vol. 64, no. 7, pp. 1684–1699, April, 2016. [Article \(CrossRef Link\)](#).
- [4] S. Halder and A. Ghosal, "A survey on mobility-assisted localization techniques in wireless sensor networks," *Journal of Network and Computer Applications*, vol. 60, pp. 82–94, January, 2016. [Article \(CrossRef Link\)](#).
- [5] J. Cota-Ruiz, P. Rivas-Perea, E. Sifuentes and R. Gonzalez-Landaeta, "A recursive shortest path routing algorithm with application for wireless sensor network localization," *IEEE Sensors Journal*, vol. 16, no. 11, pp. 4631–4637, June, 2016. [Article \(CrossRef Link\)](#).
- [6] V. Jariwala, V. Singh, P. Kumar and D. C. Jinwala, "Investigating approaches of data integrity preservation for secure data aggregation in wireless sensor networks," *Journal of Information Security*, vol. 05, no. 01, pp. 1–11, 2014. [Article \(CrossRef Link\)](#).
- [7] Z. Wang, H. Chen, Q. Cao, H. Qi, Z. Wang and Q. Wang, "Achieving location error tolerant barrier coverage for wireless sensor networks," *Computer Networks*, vol. 112, pp. 314–328, January, 2017. [Article \(CrossRef Link\)](#).
- [8] Z. Wang, Q. Cao, H. Qi, H. Chen and Q. Wang, "Cost-effective barrier coverage formation in heterogeneous wireless sensor networks," *Ad Hoc Networks*, vol. 64, pp. 65–79, September, 2017. [Article \(CrossRef Link\)](#).
- [9] Z. Wang, J. Liao, Q. Cao, H. Qi and Z. Wang, "Achieving k-Barrier Coverage in Hybrid Directional Sensor Networks," *IEEE Transactions on Mobile Computing*, vol. 13, no. 7, pp. 1443–1455, July, 2014. [Article \(CrossRef Link\)](#).
- [10] A. El Assaf, S. Zaidi, S. Affes, and N. Kandil, "Cost-effective and accurate nodes localization in heterogeneous wireless sensor networks," in *Proc. of 2015 IEEE International Conference on Communications (ICC)*, pp. 6601–6608, June, 2015. [Article \(CrossRef Link\)](#).

- [11] A. E. Assaf, S. Zaidi, S. Affes and N. Kandil, "Low-cost localization for multihop heterogeneous wireless sensor networks," *IEEE Transactions on Wireless Communications*, vol. 15, no. 1, pp. 472–484, January, 2016. [Article \(CrossRef Link\)](#).
- [12] G. R. Harik, F. G. Lobo and D. E. Goldberg, "The compact genetic algorithm," *IEEE Transactions on Evolutionary Computation*, vol. 3, no. 4, pp. 287–297, November, 1999. [Article \(CrossRef Link\)](#).
- [13] C. A. C. Coello, G. T. Pulido and M. S. Lechuga, "Handling multiple objectives with particle swarm optimization," *IEEE Transactions on Evolutionary Computation*, vol. 8, no. 3, pp. 256–279, June, 2004. [Article \(CrossRef Link\)](#).
- [14] J. Prawin, A. R. M. Rao and K. Lakshmi, "Nonlinear parametric identification strategy combining reverse path and hybrid dynamic quantum particle swarm optimization," *Nonlinear Dynamics*, vol. 84, no. 2, pp. 797–815, December, 2015. [Article \(CrossRef Link\)](#).
- [15] S. Zaidi, A. El Assaf, S. Affes and N. Kandil, "Range-Free nodes localization in mobile wireless sensor networks," in *Proc. of IEEE International Conference on Ubiquitous Wireless Broadband (ICUWB)*, pp.1-6, October 4-7, 2015. [Article \(CrossRef Link\)](#).
- [16] N. Barak, N. Gaba and S. Aggarwal, "Localization of sensor nodes using modified particle swarm optimization in wireless sensor networks," in *Proc. of International Conference on Advances in Computing, Communications and Informatics (ICACCI)*, pp.2608-2613, September 21-24, 2016. [Article \(CrossRef Link\)](#).
- [17] L. Li, L. Jiao, J. Zhao, R. Shang and M. Gong, "Quantum-behaved discrete multi-objective particle swarm optimization for complex network clustering," *Pattern Recognition*, vol. 63, pp. 1–14, March, 2017. [Article \(CrossRef Link\)](#).
- [18] Jun Sun, Wenbo Xu and Bin Feng, "A global search strategy of quantum-behaved particle swarm optimization," in *Proc. of IEEE Conference on Cybernetics and Intelligent Systems*, pp.111-116, December 1-3, 2004. [Article \(CrossRef Link\)](#).
- [19] Y. Jian-Bin and X. Wen-Bo, "Research on the node localization based on quantum particle swarm optimal algorithm for WSNs," in *Proc. of International Symposium on Distributed Computing and Applications to Business, Engineering and Science (DCABES)*, pp.309-313, October 14-17, 2011. [Article \(CrossRef Link\)](#).
- [20] J. Liu, J. Sun and W. Xu, "Quantum-behaved particle swarm optimization with adaptive mutation operator," in *Proc. of Advances in Natural Computation*, pp. 959–967, November 14-16, 2006. [Article \(CrossRef Link\)](#).
- [21] P.-H. Chen, "Particle Swarm Optimization for Power Dispatch with Pumped Hydro," *Numerical Analysis and Scientific, Particle Swarm Optimization, InTech*, 2009. [Article \(CrossRef Link\)](#).
- [22] A. Duca, L. Duca, G. Ciuprina and D. Ioan, "Neighborhood strategies for QPSO algorithms to solve benchmark electromagnetic problems," in *Proc. of 8th International Conference on Evolutionary Computation Theory and Applications*, pp. 148–155, January, 2016. [Article \(CrossRef Link\)](#).
- [23] T. WU, Y. YAN and X. CHEN, "Improved QPSO algorithm based on random evaluation and its parameter control," *Journal of Computer Applications*, vol. 33, no. 10, pp. 2815–2818, November, 2013. [Article \(CrossRef Link\)](#).
- [24] L. Zhao, X. Wen and D. Li, "Amorphous localization algorithm based on BP artificial neural network," *International Journal of Distributed Sensor Networks*, vol. 11, no. 7, p. 657241, January, 2015. [Article \(CrossRef Link\)](#).
- [25] S. Shen, B. Yang, K. Qian, W. Wang, X. Jiang, Y. She and Y. Wang, "An improved amorphous localization algorithm for wireless sensor networks," in *Proc. of International Conference on Networking and Network Applications (NaNA)*, pp. 69-72, July 23-25, 2016. [Article \(CrossRef Link\)](#).
- [26] X. Yi, Y. Liu, L. Deng and Y. He, "An improved DV-Hop positioning algorithm with modified distance error for wireless sensor network," in *Proc. of Second International Symposium on Knowledge Acquisition and Modeling*, pp. 216-218, November 30- December 1, 2009. [Article \(CrossRef Link\)](#).

- [27] Yun Wang, Xiaodong Wang, Demin Wang and D. P. Agrawal, "Range-free localization using expected hop progress in wireless sensor networks," *IEEE Transactions on Parallel and Distributed Systems*, vol. 20, no. 10, pp. 1540–1552, October, 2009. [Article \(CrossRef Link\)](#).



Wenlan Wu received her bachelor's degree in communication engineering from Tangshan University in 2015. She is pursuing her master's degree in communication and information engineering at Tianjin University of Technology, China. Her research interests include heterogeneous wireless sensor networks, wireless sensor networks localization and performance evaluation and optimization.



Xianbin Wen received his PhD from the Northwestern Polytechnical University, Xi'an, China, in 2005. He is currently a professor with the School of Computer and Communication Engineering, Tianjin University of Technology, Tianjin, China. His research interests include image interpretation, machine learning, and information hiding.



Haixia Xu received her MSc degree in applied mathematics from the Northwestern Polytechnical University, China, in 2006, and a PhD in computer science and technology from the same university in 2009. She is currently an associate professor at the School of Computer and Communication Engineering, Tianjin University of Technology, China. Her main research interests include image analysis, signal processing, and pattern recognition.



Liming Yuan received the PhD degree in computer science and technology from Harbin Institute of Technology, China, in 2014. He is currently working as a lecturer in the School of Computer Science and Engineering at Tianjin University of Technology, China. His research interests are mainly in machine learning and image processing.



Qingxia Meng received her bachelor's degree from the School of Computer, Liaocheng University in 2010, and her master's degree from the School of Computer and Communication Engineering, Tianjin University of Technology, Tianjin, China, in 2013. She is currently a PhD student at the School of Computer Science and Technology of Tianjin University. Her research interests include machine learning, image processing, remote sensing images, and synthetic aperture radar.